


## FAT-24B Fiber Access Terminal-24 Cores

### Description

FAT-24B fiber access termination box is able to hold up to 24 subscribers. It is used as a termination point for the feeder cable to connect with drop cable in FTTx network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box.


### Features

- Water-proof design with IP-66 Protection level.
- Integrated with splice cassette and cable management rods.
- Manage fibers in a reasonable fiber radius condition.
- Easy to maintain and extend the capacity.
- Fiber bend radius control more than 40mm.
- Suitable for the fusion splice or mechanical splice.
- 1\*16 Splitter can be installed as an option.
- Efficient cable management.
- 24 ports cable entrance for drop cable.


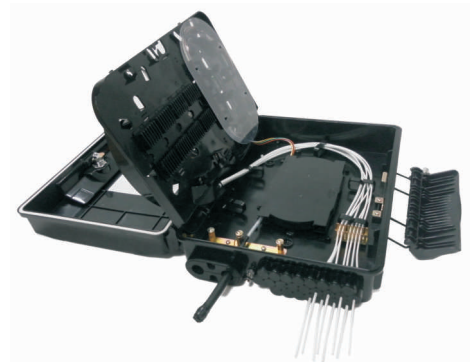


### Configuration


Material	Size	Max Capacity		Installation size	Weight	Color
PC+ABS	A*B*C(mm) 340*250*110	SC 24 Ports	PLC 1x16(SC)	D*E(mm) 154*82	1.5kg	Black




Pic 1 Box Size



Pic 2 Installation Size



Wall mounted installation



Pole ring installation

### Standard Accessories

Splice cassette and cable management tool, installation nuts and bolts, protection sleeves, hose clamp, rubber seal for cable entrance.

### Optional Accessories

Pole ring, Extra lock and key