



FAT-48B Fiber Access Terminal-48 Cores

Description

FAT-48B fiber access termination box is able to hold up to 48 subscribers. It is used as a termination point for the feeder cable to connect with drop cable in FTTx network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid SMC protection box.

Features

- Water-proof design with IP-66 Protection level.
- Integrated with splice cassette and cable management rods.
- Manage fibers in a reasonable fiber radius condition.
- Easy to maintain and extend the capacity.
- Fiber bend radius control more than 40mm.
- Suitable for the fusion splice or mechanical splice.
- 6pcs of 1*8 mini Box Splitter can be installed as an option.
- Efficient cable management.
- 3 ports cable entrance for feeder cable and 3 for distribution cable.

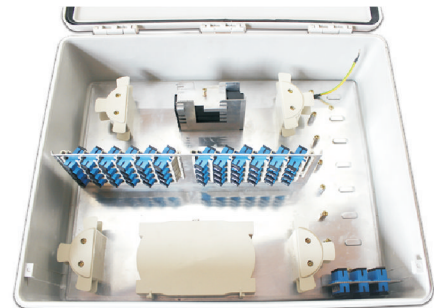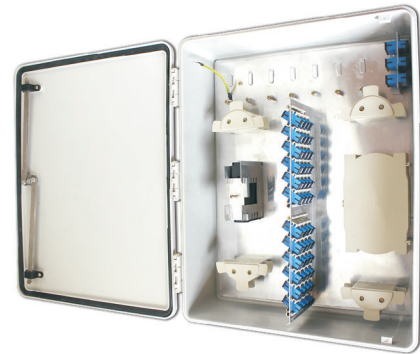

Configuration

Material	Size	Max Capacity		Empty Weight	Loaded Weight	Color
SMC	A*B*C(mm) 488*388*140	SC 48 Ports	Mini Box PLC 1x8(SC) 6pcs	6.5kg	8.5kg	White

Standard Accessories

Splice cassette and cable management tool, installation nuts and bolts, protection sleeves, hose clamp, rubber steal for cable entrance.

Optional Accessories

Pole ring, Extra lock and key